


## CETUS® Printable Textile Labels

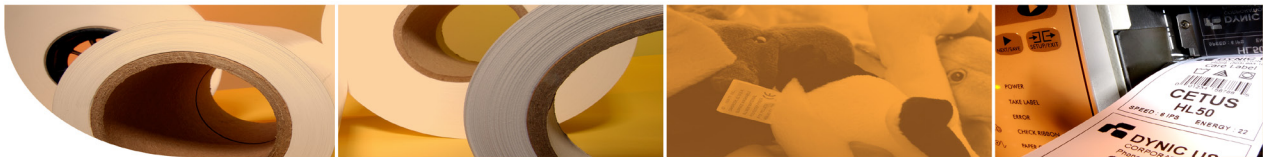

# CP1140SS

## CP1140ss Woven Nylon Coated with Polyamide

### Properties

Characteristics	Unit	Specification	Test Method
Thickness	μ	120 - 10 + 15	Dial Micrometer
Width	mm	Nominal - 0 + 25.4	Calipers
Length	m	Nominal - 0 + 1	Linear Counter

Property	Unit	Value	Test Method
Smoothness (Bekk)	Seconds	≥ 150	Oken Type
Tearing Strength	Kgf	Warp ≥ 350, Weft ≥ 200	JIS-L-1096

### Attributes

Printable	One Side Only
Print Technologies	Thermal Transfer (with HL30, HL35, HL101) Flexography Offset Letterpress Impact

Storage: 5° to 35°C; 35 to 85% RH; Shelf Life 2 Years

### Recommended Applications



- Washable (50 Cycles)
- Dry Cleanable (50 Cycles)
- Wire Tag & Labels
- Customer Adds Own Adhesive

### Certifications

- RoHS (2002/95/EC)