


## CETUS® Printable Textile Labels

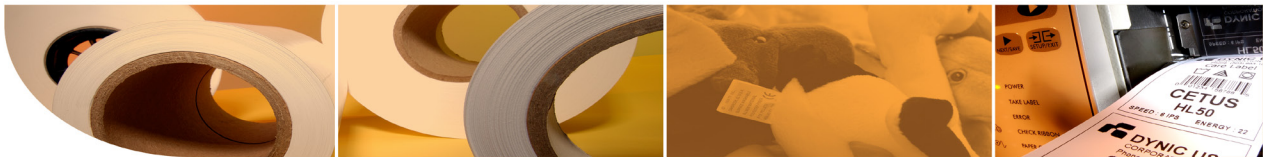

# CP6301K

### CP6301K

#### Woven Polyester Coated with Urethane

##### Properties

Characteristics	Unit	Specification	Test Method
Thickness	μ	90 ± 20	Dial Micrometer
Weight	h/m <sup>2</sup>	68 ± 10	10cm X 10cm Sample
Width	mm	Nominal - 0 + 25.4	Calipers
Length	m	Nominal - 0 + 1	Linear Counter

Property	Unit	Value	Test Method
Smoothness (Bekk)	Seconds	≥ 500	Oken Type
Tearing Strength	gf	Warp ≥ 200, Weft ≥ 100	JIS-L-1096

##### Attributes

Printable	One Side Only
Print Technologies	Thermal Transfer (with HL35, HL101) Letterpress Offset Impact Thermography

Storage: 5° to 35°C; 35 to 85% RH; Shelf Life 2 Years

#### Recommended Applications



- Garment Labels
- Withstands Stone-Washing

#### Certifications

- RoHS (2002/95/EC)