


CETUS® Printable Textile Labels

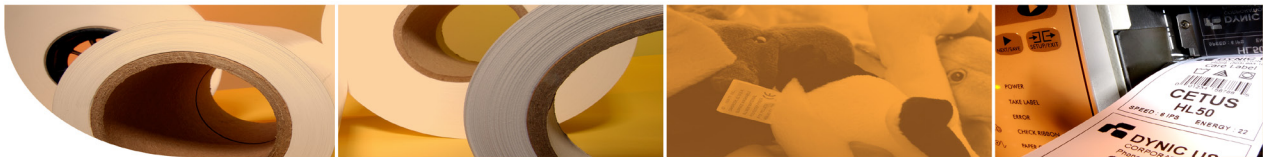

CP8202

CP8202

Black Polyester Satin Coated with Polyurethane

Properties

Characteristics	Unit	Specification	Test Method
Thickness	μ	100 ± 10	Dial Micrometer
Width	mm	Nominal - 1 + 2	Calipers
Length	m	Nominal - 0 + 1	Linear Counter

Property	Unit	Value	Test Method
Tearing Strength	N	Warp > 2.9, Weft > 2.9	JIS-L-1096
Tensile Strength	N/3cm	Warp > 196, Weft > 98	JIS-L-1096
Smoothness (Bekk)	Seconds	> 20	Oken Type

Attributes

Printable	One Side Only
Print Technologies	Thermal Transfer (with HL35, HL101)
Burn Resistance	≥ Self-Extinguishing

Storage: 5° to 35°C; 35 to 85% RH; Shelf Life 2 Years

Recommended Applications



- Washable (50 Cycles)
- Dry Cleanable (50 Cycles)
- Seat Belt Labels
- Applications That Require Self-Extinguishing
- Lingerie Labels

Certifications

- FMVSS 302