


CETUS® Printable Textile Labels

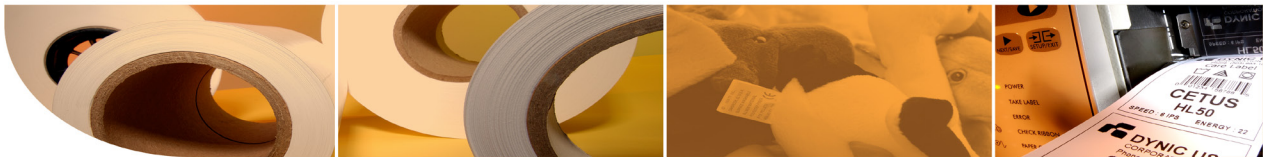

CT708R2

CT708R2

Dip-Coated Nylon Taffeta with Polyamide

Properties

Characteristics	Unit	Specification	Test Method
Thickness	μ	118 ± 6	Dial Micrometer
Weight	g/m ²	72 ± 5	10cm X 10cm Sample


Property	Unit	Value	Test Method
Tearing Strength	gf	Warp ≥ 450, Weft ≥ 200	JIS-L-1096

Attributes

Thread Count	175
Printable	Both Sides
Print Technologies	Thermal Transfer (with HL30, HL35, HL101) Letterpress Silk Screening Hot Stamp

Storage: 5° to 35°C; 35 to 85% RH; Shelf Life 2 Years

Recommended Applications

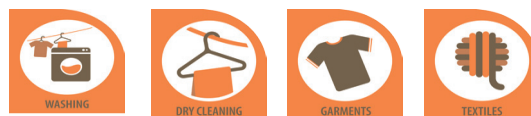

- Washable (50 Cycles)
- Dry Cleanable (50 Cycles)
- Garment Care Labels
- Textile Labels

Certifications

- RoHS (2002/95/EC)